



NEW DIRECTIONS IN REAL-TIME EARTHQUAKE CHARACTERIZATION AND EARLY WARNING DAMAGE PREDICTION AT DIFFERENT SCALES

Matteo PICOZZI¹, Aldo ZOLLO¹, Stefano PAROLAI², Dino BINDI², Massimiliano PITTORE², Simona COLOMBELLI¹, Antonio EMOLO¹, Gaetano FESTA¹, Luca ELIA³, Ortensia AMOROSO¹ and Claudio MARTINO³

Rapid urbanisation, the interconnection of economies and growing dependence on technology makes modern society increasingly vulnerable to natural disasters.

In case of earthquakes, the mitigation of seismic risk in urban and industrial area can be effectively accomplished by Earthquake Early Warning systems (EWS), which performs real-time event detection and characterization, issues rapid alerts, and thus, allow both to protect the population and reduce the vulnerability of civil and industrial structures, as well as industrial machineries, by starting automatic security procedures.

This work provides an overview of some significant advancement achieved during the last years in the research field of EWS, which focus on the early warning damage prediction at different scales. In particular, we cover an ideal path from large scale seismological towards site-specific structural-engineering EWS applications.

The first part is dedicated to the review of the real-time procedure proposed by Zollo et al. (2010) for the early warning P-waves driven prediction at regional scale of the Potential Damaged Zone (PDZ). The method is implemented in the PRESTo system (PRobabilistic and Evolutionary early warning SysTem), a highly configurable and easily portable platform for Earthquake Early Warning developed by the RISSC-Lab of the Department of Physics at the University of Naples 'Federico II'. It combines a regional and an on-site approach and exploits the characteristic P-waves period (τ_c) and the peak displacement (P_d) measured on the initial P-wave signal at each station, which then are compared with threshold values previously established through an empirical regression analysis, and delivers an alert level at each station correlated with the expected local damage. Therefore, integrating the measured on-site parameters at stations (P_d , τ_c) and the estimated regional parameters (hypocenter), PRESTo can identify the damage area in a few seconds after the event origin with a good matching with the instrumental intensity maps produced much later. PRESTO is currently under evaluation at the ISNET network (Italy), as well as other international site (e.g. South Korea, Spain, Romania).

The second part of the work aims at presenting a first attempt to design an early warning and rapid response procedure for real-time risk assessment at the scale of a metropolitan area (Picozzi et al. 2013). In particular, the procedure uses the typical real-time information (i.e. P-wave time arrivals and early waveforms) coming from a regional seismic network for locating and evaluating the size of

¹ University of Naples Federico II, Department of Physics – AMRA S.c.a.r.l., Naples, Italy, matteo.picozzi@unina.it

² Helmholtz-Zentrum Potsdam Deutsches GeoForschungsZentrum GFZ, Potsdam, Germany

³ AMRA Analysis and Monitoring of Environmental Risk, Naples, Italy

an occurring seismic event, information which in turn is exploited for extracting damage and loss maps from a datasets of predicted scenarios compiled for a target city. A feasibility study of the procedure for the city of Bishkek, capital of the Kyrgyz Republic, that is surrounded by the Kyrgyz seismic network (KNET, Vernon 1992, 1994) is provided.

Finally, moving in the direction of EEWs for specific structures, we present an innovative on-site earthquake early warning procedure for buildings, which is based on the use of early P-waves recordings collected by an accelerometer at the base level and one at the top level of a structure (Picozzi 2012). In particular, the early P-waves signals are exploited to obtain a first estimation of both the incoming event size, as well as of the structure impulse response function. Then, these latter pieces of information are in turn convolved to obtain a real-time estimation of the acceleration and response spectra at the top level of the structure, which could be profitably used to provide early warning alarms, or for example, to modify the characteristics of semi-active seismic security devices before the larger shaking of the incoming event hits the structure. An application of the procedure using the recordings of three aftershocks of the L'Aquila sequence 2009 that have been collected at the Navelli's city hall is shown.

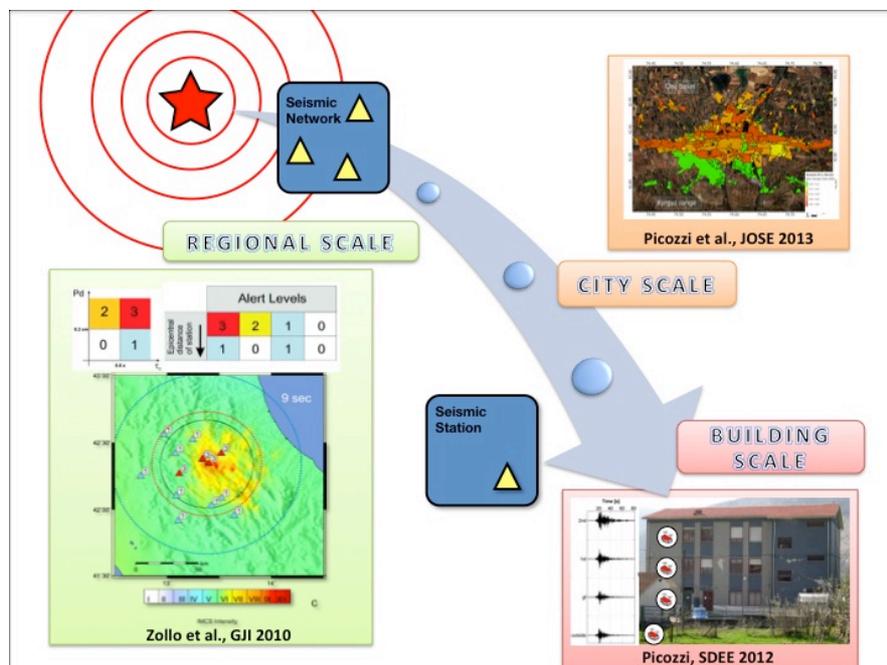


Figure 1. Schematic overview of the EEW methodology proposed for the real-time prediction of damage from P-wave analysis at different scales.

REFERENCES

- Picozzi M, Bindi D, Pittore M, Kieling K, and Parolai S, (2013) Real-time risk assessment in seismic early warning and rapid response: a feasibility study in Bishkek (Kyrgyzstan), doi: 10.1007/s10950-012-9332-5
- Picozzi M (2012) An attempt of real-time structural response assessment by an interferometric approach: a tailor-made earthquake early warning for buildings. *Soil Dynamics and Earthquake Engineering*, 38, 109–118, doi:10.1016/j.soildyn.2012.02.003
- Vernon F (1992) Kyrgyzstan seismic telemetry network, *IRIS newsletter*, p 7–9, XI, 1
- Vernon F (1994) The Kyrgyz seismic network, *IRIS newsletter*, p 7–8, XIII, 2
- Zollo A, Amoroso O, Lancieri M, Wu YM, Kanamori H (2010) A threshold-based earthquake early warning using dense accelerometer networks, *Geophys J Int* 183:963-974